


Building and Maintenance Tips

- Check the lumber end tag. Make sure that the intended use shown on the tag matches your application.
- For 2" lumber, use 3 1/4" nails or 3" screws. For 5/4" decking, use 3" nails or 2 1/2" screws.
- Use hot-dipped galvanized fasteners (meeting ASTM A 153) and connectors (ASTM A 653 Class G185 sheet), or better.
- Aluminum should not be used in direct contact with this wood.
- Screws hold boards securely and allow for easier removal.
- Do not put end cuts on or in ground.
- Cover upper ends of posts with post caps or cut them at angles to shed water. Liberally coat all cut ends, holes, or other intrusions into the wood with suitable wood preservative product containing 2% copper as copper naphthenate.
- Depending upon exposure and weather conditions, color longevity can vary. Upon external exposure the brown colour slowly weathers to a warm honey brown and in the longer term becomes a natural silver grey. If desired, the brown colour can be refreshed with a suitable brush-on product. This weathering process does not indicate any loss of preservative protection.
- To help maintain a beautiful appearance, apply water repellent every other year. To revitalize a dingy appearance caused by dirt and mildew, use a deck cleaner.



Lifetime Limited Warranty. See www.WolmanizedWood.com/warranty

PRESERVED WOOD — Nature made it first. We make it last.

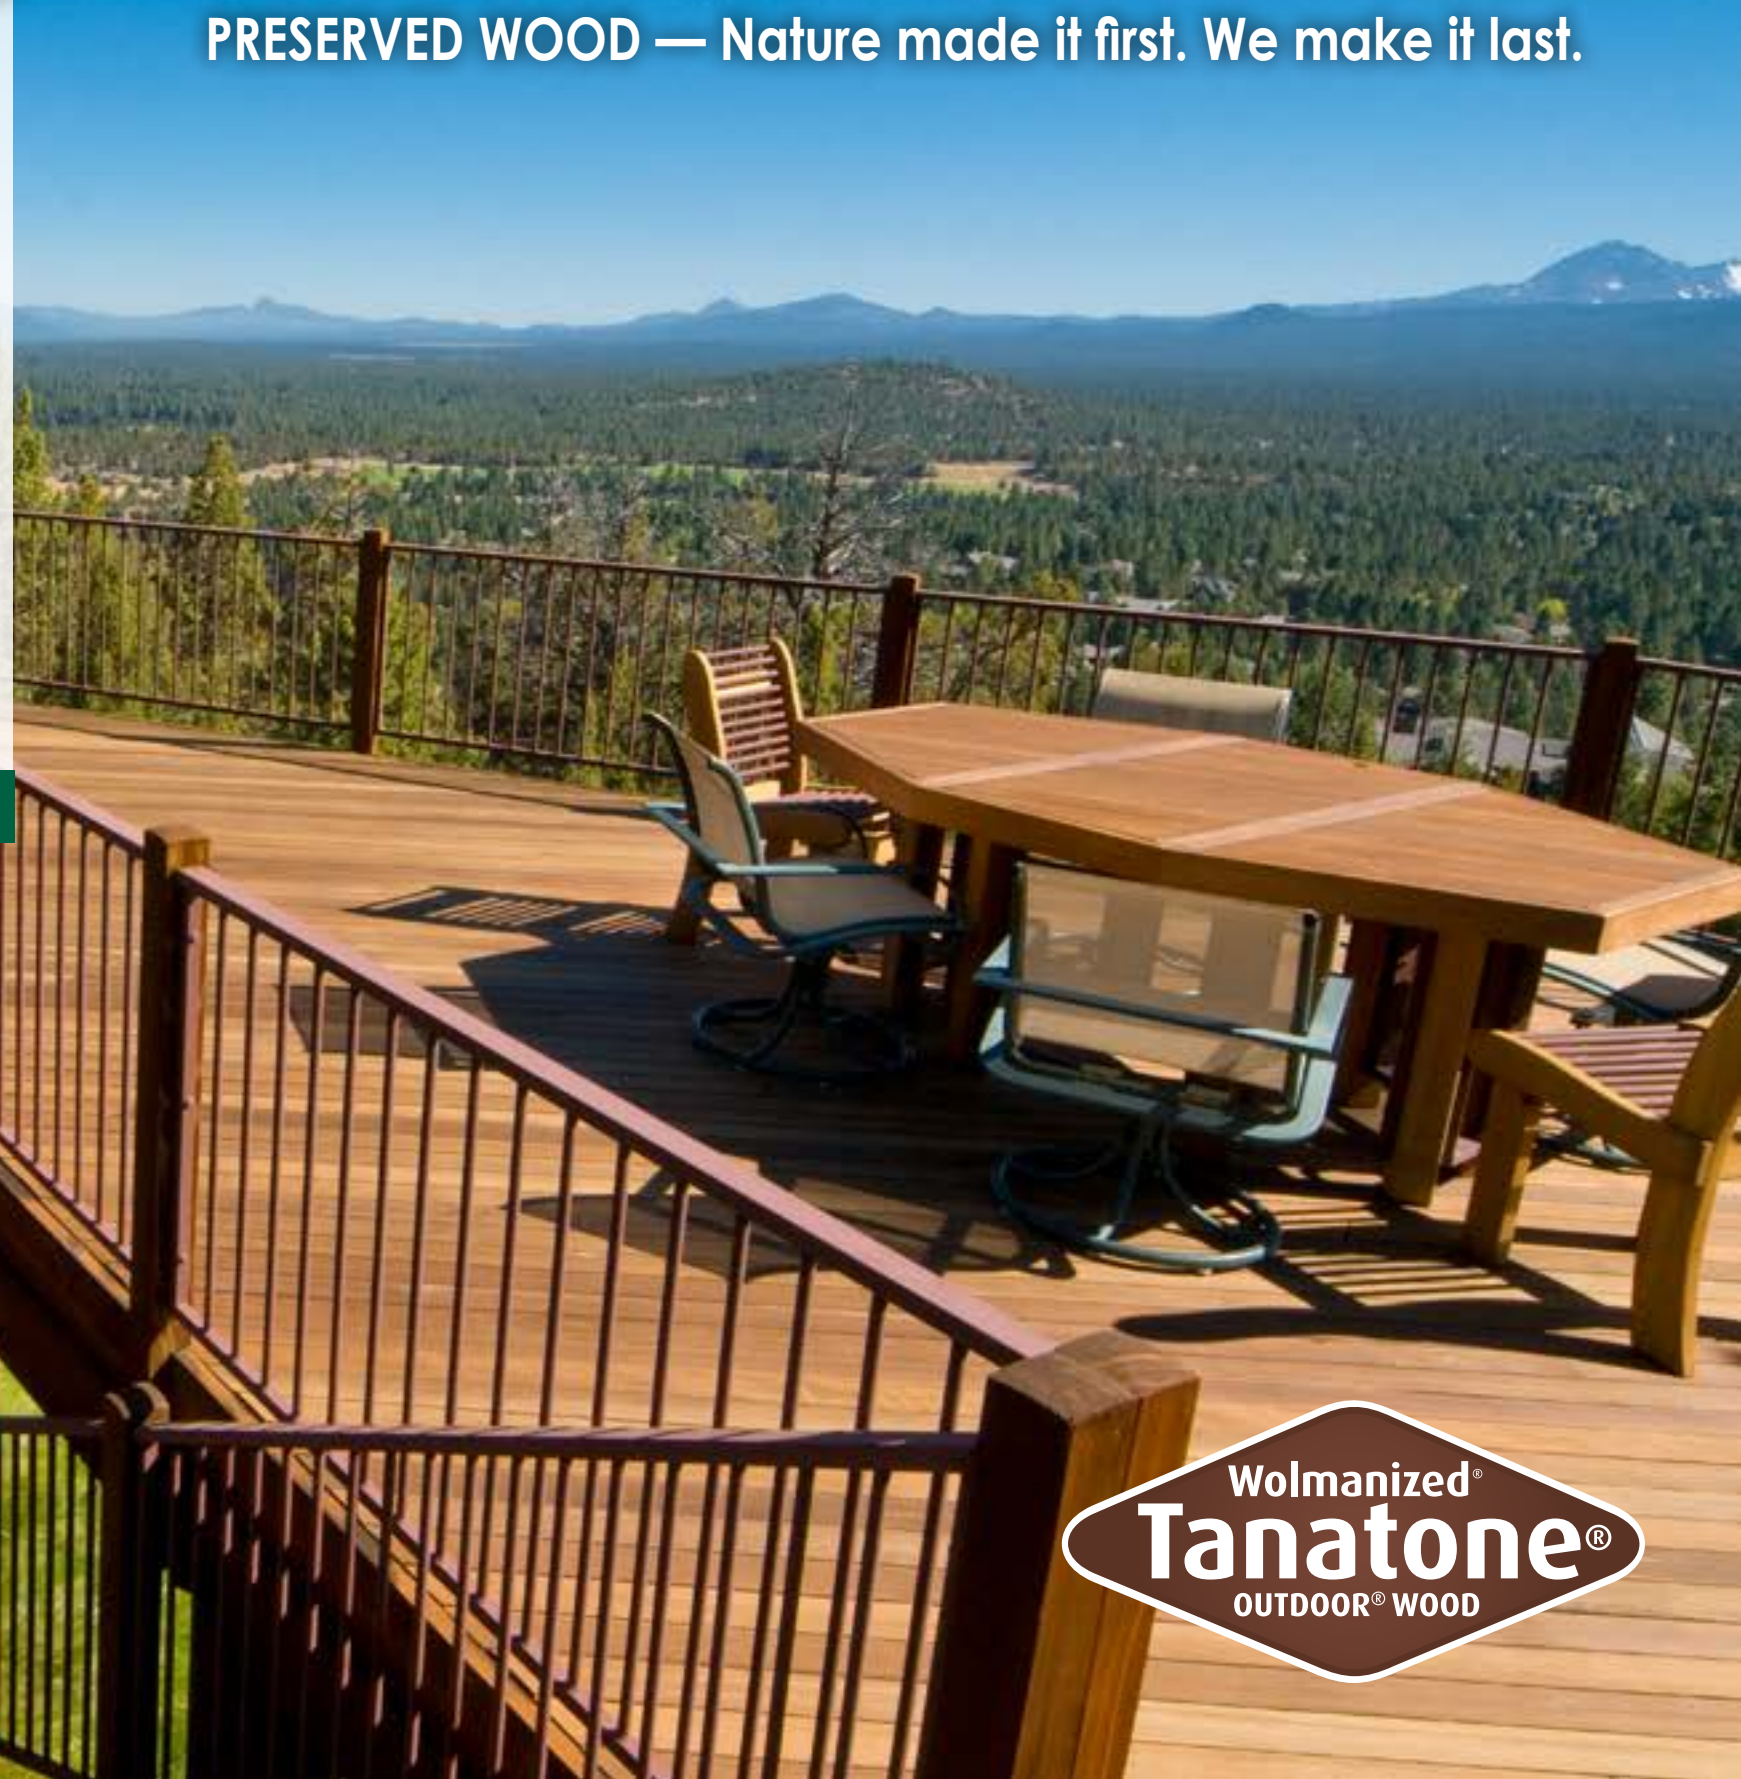

Note: Colour shown in the photo may differ from the actual product.


Taiga Exterior Wood Products

Wolmanized® Outdoor® Wood from Taiga Exterior Wood is a trusted brand that is tough enough to stand up to termites and fungal decay and is versatile enough to be used in all types of natural environments. It is treated with Wolman® NB copper azole preservative and has a natural greenish hue or can be coloured during the treatment process. It is ideal for use in Above Ground, Ground Contact and Fresh Water applications.



ABOVE GROUND

- Decking
- Railing
- Fencing
- Wood furniture
- Pergola canopy
- Picnic tables

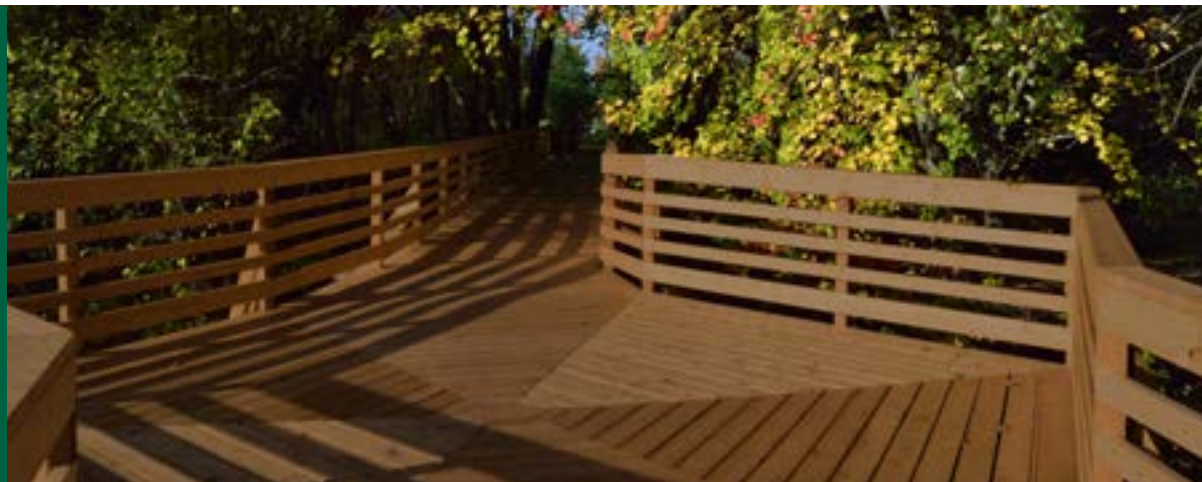

GROUND CONTACT

- Planter beds
- Joists/beams
- Posts
- Stair stringers
- Retaining walls
- Playground equipment



FRESH WATER

- Dock boards
- Joists
- Railing



It is important to choose the right wood for the intended application. Each piece of treated wood has an end tag that lets you know for which use the wood is intended. These end use descriptions refer to the types of conditions in which the wood is intended to perform.

Decades of Proven Performance

Wolmanized® Outdoor® Wood is pressure treated with Wolman® NB copper azole, a trusted preservative used in Canada for decades, to protect against termites and fungal decay.



- Proven in multiple species including Spruce Pine Fir (SPF), Douglas Fir, SYP, Larch, Hem/Fir, Ponderosa Pine, and more.
- Made with real wood — a renewable, naturally beautiful resource harvested in appropriate, responsible manner.
- Ideal for decking, railing, structural deck components, playgrounds and other backyard projects.
- Versatile to use in fencing and other landscaping applications.
- More economical than alternatives such as cedar, hardwoods, and plastic composites.
- Available with Tanatone® colourant in attractive, rich tones that slowly weather to warm honey brown then to natural silver grey.
- Limited lifetime warranty. For more information, visit www.wolmanizedwood.com/warranty.

AVAILABLE WITH TANATONE® COLOURANT

- Factory-applied colourant included with preservative treatment
- Saves time and money eliminates need for initial staining
- Design choice available in a variety of rich colours to match your style preference



taiga
building products

Taiga, the leading independent wholesale distributor of building materials, has 15 Canadian distribution branches.

TAIGA BUILDING PRODUCTS
www.taigabuilding.com