

Easily installed.

Easy to use: With the CLIC it! installation system, all our floors are safe, quick and can be easily installed in any room. The superior profile tightness and optimum fit offer additional protection against moisture.




» More information:
egger.com/clicit
egger.com/flooring-distributors





Choose your preferred installation method





Option A – plank by plank

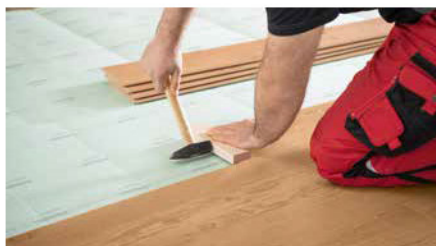

Option B – tapping

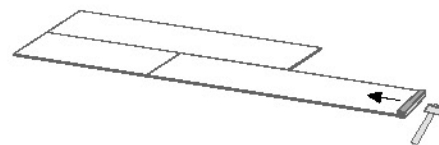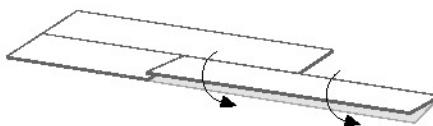

Option C – row by row



Aqua+ Laminate Flooring

Technical Data Sheet

Coreboard	HDF swell barrier plus (emission standard E1, CARB2/TSCA VI), HDF Aqua plus (E1, CARB2/TSCA VI)
Profile	CLIC it!

Declared performance according to EN 14041

Formaldehyde according to EN 717-1	E1	Slip resistance according to EN 13893	DS, $\geq 0,3$
Thermal conductivity according to EN 12524	0,12 W/(m*K)	Antistatic properties according EN 1815	yes, < 2 kV
Fire classification according to ASTM E648	Class 1		

Classification and general requirements according to EN 13329

Class of use	32	32 Aqua+
Class of use	32	32 Aqua+
Guarantee domestic area	20 years	„Limited Lifetime“ max. 25 years
Guarantee commercial area	5 years	5 years
Abrasion resistance, test methode A according EN 13329, Annex E	AC4 / ≥ 4.000 cycles	AC4 / ≥ 4.000 cycles
Impact resistance, test methods "small/ big ball" according EN 13329, Annex H	" ≥ 12 N / ≥ 2.7 lbf ≥ 29.5 in"	" ≥ 12 N / ≥ 2.7 lbf ≥ 29.5 in"
Resistance to staining EN 438 - 2	"group 1 + 2: level 5 group 3: level 4"	"group 1 + 2: level 5 group 3: level 4"
Thickness swelling according ISO 24336	≤ 18 %	≤ 5 % (± 1)
Static indentation by constant pressure according ISO 24343-1	$\leq 0,0020$ in	$\leq 0,0020$ in
Effect of furniture leg according EN 424 (foot Type 0)	No change in appearance or damage	No change in appearance or damage
Effect of a castor chair according EN 425	25.000 cycles	25.000 cycles
Profile strength lengthways / crossways according to ISO 24334	" $\geq 1,0$ kN/m / $\geq 2,0$ kN/m"	" $\geq 1,0$ kN/m / $\geq 2,0$ kN/m"
Dimensional tolerances of the board according to ISO 24337	"length $\pm 0,02$ in width $\pm 0,004$ in thickness $\pm 0,02$ in"	"length $\pm 0,02$ in width $\pm 0,004$ in thickness $\pm 0,02$ in"

Format & Packaging

Dimension (length x width) inch	"Classic 50.87 x 7.6"	"Classic 50.87 x 7.6"	"Kingsize 50.87 x 12.87"	"Classic 50.87 x 7.6"	"Classic 50.87 x 7.6"	"Kingsize 50.87 x 12.87"
Total thickness	8 mm	12 mm	8 mm	8 mm	12 mm	8 mm
Coreboard	HDF swell barrier+	HDF swell barrier+	HDF swell barrier+	HDF aqua+ 	HDF aqua+ 	HDF aqua+ 
AC rating	AC 4	AC 4	AC 4	AC 4	AC 4	AC 4
Bevel, without	✓					
Bevel, Lengthwise						
Bevel, circumferential	✓	✓		✓	✓	
Bevel, circumferential + 1	✓					
Packet information	Piece	8	6	6	8	6
	ft²	21,47	16,10	27,29	21,47	16,10
	lb (+/- 5%)	32,06	36,18	40,37	32,59	37,18
Pallet information	Packet per pallet	60	52	40	60	52
	ft²	1288,4	837,4	1091,4	1288,4	837,4
	lb (+/- 5%)	1923.6	1936.0	1682.4	2037.4	2006.6

www.egger.com

EGGER Flooring International
GmbH & Co. KG
Am Haffeld 1
23970 Wismar
Germany
T +49 3841 301-0
F +49 3841 301-20222
flooring@egger.com