

MORE FROM WOOD.



Egger PRO Laminate Flooring

Aqua+ Specification Guide





Plant Wismar

EGGER – More from wood.

EGGER has stood for quality products for decades: We create more from wood. Living and working with wood is our passion.

Founded in 1961 in St. Johann in Tirol (Austria), EGGER today is a steadily growing and internationally active family business. As a full-range supplier for furniture and interior design, structural wood construction and flooring, we're one of the world's leading manufacturers of wood-based materials.

We deliver on our promises of quality, sustainability, innovation and professionalism, bringing these qualities to life to meet the high demands of our customers time and again.

Our PRO Laminate Flooring with special Aqua+ technology is engineered for water resistance. Thanks to the water-resistant coreboard, it's perfect for bathrooms, kitchens and hallways, and, of course, for commercial use with frequent cleaning, even with steam cleaners.



Laminate Flooring Aqua⁺

Our Laminate Flooring with special Aqua⁺ technology is engineered for water resistance, even standing up to steam cleaning.



- 1 Hard-wearing, highly abrasion-resistant surface
- 2 Decor image
- 3 Aqua⁺ coreboard
- 4 Balancer

More Transparency:
www.egger.com/ecofacts



– 6.01 kg CO₂/m²




83% material from
renewable resources



78% by-products from
the sawmill industry

12 mm Classic



EPL015
Valley Oak Smoke



EPL018
La Mancha Oak



EPL019
Parquet Oak Dark



EPL158
White Valley Oak



EPL036
Bardolino Oak Gray



EPL165
Natural Bardolino Oak




EPL159
Natural Valley Oak



EPL076
Gray Brynford Oak



8 mm Classic



EPL143
Cesena Oak White



EPL015
Valley Oak Smoke




EPL075
Dark Dunnington Oak






Looks like wood. And feels like it too.


Accurately reproduced and incredibly authentic. Our embossed-in-register (EIR) surfaces bring decors to life by perfectly aligning the decor knots, cracks and grains with the texture.

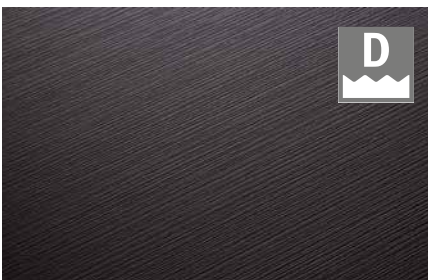

Deepskin
Striking texture with depth

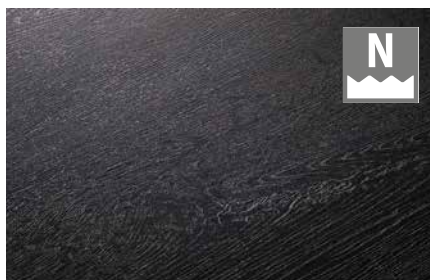

Natural Pore
Authentic woodgrain true to the decor

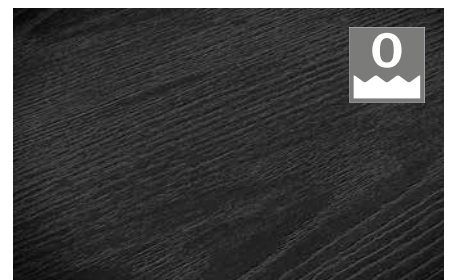

Omnipore
Elegant – natural wood pore

Key product benefits

Water Resistant

Offering up to 72 hours of water resistance, Aqua+ Laminate Flooring is ideal for those areas where you need added protection from moisture and water, including kitchens and bathrooms.



Environmentally Friendly

Naturally wood based, Aqua+ Laminate Flooring offers a great environmentally friendly option, which is PVC free. Aqua+ Our Laminate Flooring is also 100% recyclable.



Impact Resistant

Engineered to be durable and hard-wearing, Aqua+ Laminate Flooring is tested to perform against impacts, and will not show indentations from furniture.



Commercial Guaranteed

Products are guaranteed and suitable for most commercial applications.

Natural Looking

Realistic designs and textures ensure your new flooring offers an authentic-looking floor in woodgrain or material reproduction designs.



Easy Cleaning

Laminate flooring is easy to clean and maintain. And Aqua+ Laminate Flooring can also be machine cleaned or steam cleaned.

Stain and Fade Resistant

Thanks to the the manufacturing process and surface design, Aqua+ Laminate Flooring offers a resilient surface that is highly stain resistant and will not fade in sunlight, meaning your floors stay beautiful longer.



Quick and easy to install

Installing our flooring is quick and easy, with the Click! Locking system, allowing for alternative installation methods.

Suitable for residential and most commercial use.



Retail Shops



Offices



Kitchens



Bathrooms



Living Spaces



Restaurants & Bars



Hotels

Easily installed.

Easy to use: With the CLIC it! installation system, all our floors are safe, quick and can be easily installed in any room. The superior profile tightness and optimum fit offer additional protection against moisture.



» More information:
egger.com/clicit
egger.com/flooring-distributors





Choose your preferred installation method





Option A – plank by plank



Option B – tapping

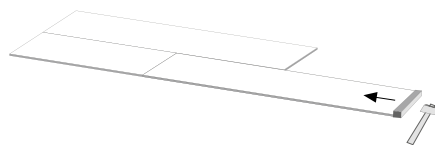

Option C – row by row



Aqua+ Laminate Flooring

Technical Data Sheet

Coreboard	HDF swell barrier plus (emission standard E1, CARB2/TSCA VI), HDF Aqua plus (E1, CARB2/TSCA VI)
Profile	CLIC it!




Declared performance according to EN 14041

Formaldehyde according to EN 717-1	E1	Slip resistance according to EN 13893	DS, $\geq 0,3$
Thermal conductivity according to EN 12524	0,12 W/(m*K)	Antistatic properties according EN 1815	yes, < 2 kV
Fire classification according to ASTM E648	Class 1		

Classification and general requirements according to EN 13329

Class of use	32	32 Aqua+
Class of use	32	32 Aqua+
Guarantee domestic area	20 years	„Limited Lifetime“ max. 25 years
Guarantee commercial area	5 years	5 years
Abrasion resistance, test methode A according EN 13329, Annex E	AC4 / ≥ 4.000 cycles	AC4 / ≥ 4.000 cycles
Impact resistance, test methods "small/ big ball" according EN 13329, Annex H	" ≥ 12 N / ≥ 2.7 lbf ≥ 29.5 in"	" ≥ 12 N / ≥ 2.7 lbf ≥ 29.5 in"
Resistance to staining EN 438 - 2	"group 1 + 2: level 5 group 3: level 4"	"group 1 + 2: level 5 group 3: level 4"
Thickness swelling according ISO 24336	≤ 18 %	≤ 5 % (± 1)
Static indentation by constant pressure according ISO 24343-1	$\leq 0,0020$ in	$\leq 0,0020$ in
Effect of furniture leg according EN 424 (foot Type 0)	No change in appearance or damage	No change in appearance or damage
Effect of a castor chair according EN 425	25.000 cycles	25.000 cycles
Profile strength lengthways / crossways according to ISO 24334	" $\geq 1,0$ kN/m / $\geq 2,0$ kN/m"	" $\geq 1,0$ kN/m / $\geq 2,0$ kN/m"
Dimensional tolerances of the board according to ISO 24337	"length $\pm 0,02$ in width $\pm 0,004$ in thickness $\pm 0,02$ in"	"length $\pm 0,02$ in width $\pm 0,004$ in thickness $\pm 0,02$ in"

Format & Packaging

Dimension (length x width) inch	"Classic 50.87 x 7.6"	"Classic 50.87 x 7.6"	"Kingsize 50.87 x 12.87"	"Classic 50.87 x 7.6"	"Classic 50.87 x 7.6"	"Kingsize 50.87 x 12.87"
Total thickness	8 mm	12 mm	8 mm	8 mm	12 mm	8 mm
Coreboard	HDF swell barrier+	HDF swell barrier+	HDF swell barrier+	HDF aqua+ 	HDF aqua+ 	HDF aqua+ 
AC rating	AC 4	AC 4	AC 4	AC 4	AC 4	AC 4
Bevel, without	✓					
Bevel, Lengthwise						
Bevel, circumferential	✓	✓		✓	✓	
Bevel, circumferential + 1	✓					
Packet information	Piece	8	6	6	8	6
	ft²	21,47	16,10	27,29	21,47	16,10
	lb (+/- 5%)	32,06	36,18	40,37	32,59	37,18
Pallet information	Packet per pallet	60	52	40	60	52
	ft²	1288,4	837,4	1091,4	1288,4	837,4
	lb (+/- 5%)	1923,6	1936,0	1682,4	2037,4	2006,6
						1750,8

www.egger.com

EGGER Flooring International

GmbH & Co. KG

Am Haffeld 1

23970 Wismar

Germany

T +49 3841 301-0

F +49 3841 301-20222

flooring@egger.com